

Nobody Compares

To Our Guts

Silver Lining Dryer Cylinder, with galvanized steel interior, won't corrode, chip, crack or pit in normal use.

Quantum™ System makes programming the machine a breeze. The easy-to-read display shows vend price, cycle time and cycle status.

Large Coin Vault Option is capable of handling \$150 worth of coins.

Bitron Spring Hook Lock and Door Switch

Sealed Bearing and Aluminum Bearing Housing

Aluminum Pulley

Stainless Steel Outer DRAINTUB

Front Serviceability means all major components can be serviced through upper or lower access panel.

Commercial-Duty Brushless Induction Motor and High-Tech Drive

Four Heavy-Duty Shock Absorbers



Extra-Large Capacity means large loads aren't a problem. The 18 lb capacity 7.0 cu. ft. cylinder delivers superior tumble action to handle permanent press fabrics.

Superior Airflow (220 cfm)* and tumble action generated through 1/3 HP motor with quiet, efficient blower assembly.

* Measured at point of exit from dryer.

Electronic Controls Display Vend Price, Cycle Countdown and Cycle Status

Multi-Compartment Supply Dispenser

Stainless Steel Washtub 2.84 cu. ft. (18 lb) Capacity

Heavy-Duty Door Hinge

Large Stainless Steel Baffles for Superior Wash Action

Out-of-Balance Switch

Heavy-Duty Electric Pump with Foreign Object Trap or Reliable Drain Valve

Nobody compares with Speed Queen because you get more than quality products. You get peace of mind because you're dealing with a company that is committed to the multi-housing industry. You get the on-going support of a national network of authorized Speed Queen route operators. And you get state-of-the-art electronic technology to maximize community laundry room profitability. What else would you expect from the world's leading supplier of commercial laundry equipment?

So what are you waiting for? Call us at 1-800-345-5649.


Stack Washer/Dryer

Quantum™ System Panel



Features: Digital display for vend price and cycle time countdown. Touch pad control with LEDs. Three temperature selections for Hot, Warm or Cold water. Three fabric selections for Normal, Permanent Press or Delicate. Three soil level selections for light, medium, or heavy, offering 27 possible cycles. Push-to-Start activation. LEDs show the cycle and the door lock status.

Micro-DISPLAY Control Panel

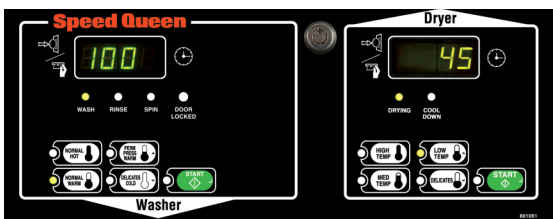

Features: Digital display for vend price and cycle time countdown. Touch pad control with LEDs. Four fabric cycle selections for Normal/Hot, Normal/Warm, Permanent Press/Warm, Delicate/Cold. Push-to-Start activation. Cue light indicates door is locked. LEDs show the cycle and the door lock status.

Quantum™ and MDC models are available with card or coin start operation.

ULTRA HIGH EFFICIENCY COMMERCIAL WASHER WATER USAGE

All Standard Front Load DOE "J1" Testing				
Water Temp	Hot	Cold	Total Water Consumption	DOE Cycle %
Hot	5.0	9.8	14.8 Gal	14%
Warm	1.8	13.0	14.8 Gal	49%
Cold	0.0	14.8	14.8 Gal	37%
Average Hot Water Per Cycle				1.59 Gal

* Water usages may vary for your particular application.
** With wash and 2 rinse pressure fills.

Modified Energy Factor: 2.16
Water Factor: 5.2



Modified Energy Factor: 2.24
Water Factor: 4.5

All EcoWatersaver Front Load DOE "J1" Testing				
Water Temp	Hot	Cold	Total Water Consumption	DOE Cycle %
Hot	4.1	8.7	12.8 Gal	14%
Warm	1.6	11.2	12.8 Gal	49%
Cold	0.0	12.8	12.8 Gal	37%
Average Hot Water Per Cycle				1.36 Gal

* Water usages may vary for your particular application.
** 1 with wash, 1 rinse time fill and 1 rinse pressure fill.

WASH CYCLE FACTORY DEFAULT AND DRYER ADVANTAGES AND SELECTIONS

Functions	Horizon Cycle Operation		
	Normal	Permanent Press	Delicate
Cycle	Normal	Permanent Press	Delicate
Water Temp. Options	H-W-C*	H-W-C*	H-W-C*
Wash Action	Reversing	Reversing	Reversing
Speeds			
• Wash/Tumble (RPM)	50	50	41
• Distribution/Pump (RPM)	90	90	90
• Spin & Pump (RPM)	650	650	500
• Extract (RPM)	1000	1000	500
Total Cycle Time	29:00	27:00	23:00

* Hot, Warm, Cold.

Feature	Specification	Advantage
Cabinet Height	76 5/8"	Space-Saving Design
Door Opening	2.06 sq. ft.	Easy to Load
Cylinder Size	7.0 cu. ft.	Improves Tumbling
Lint Filter	Secured	Prevents Removal

Temperature Selection		
Temperature	Standard Setting	Programming Options
High	160°	110°-160°
Medium	155°	110°-160°
Low	145°	110°-160°
Delicate*	115°	110°-160°
No Heat	No Heat	No Heat

* Quantum™ dryers only.